


PUR Hotmelt Adhesives for Edge Banding

Renewable carbon-based raw materials inside



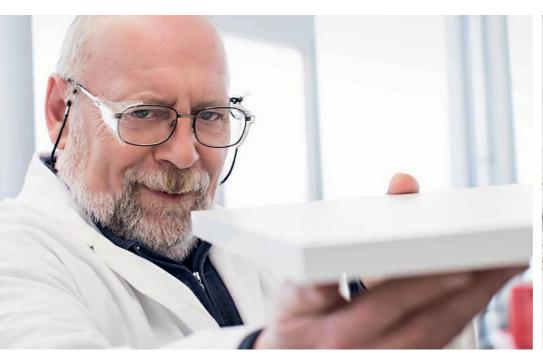

TECHNOMELT PUR 279/9

Customer Benefits & Characteristics

- » Contains 10% renewable carbon-based raw materials
- » Lower product carbon footprint (CO2.eq./kg, cradle-to-gate)
- » Carries all the advantages of a PUR hotmelt adhesive for edge banding
 - » High heat and moisture resistance
 - » High Bond Strength
- » Clean processing hotmelt

Application

- » For use in equipment suitable for PUR hotmelt adhesives
- » Line speed from 15 m/min
- » All common edge band materials (ABS, PP, PVC, veneer, melamine, polyester)

GET IN CONTACT WITH US

- >> Additional information
- >> Data sheets
- >>> Trial request

E-mail: wood@henkel.com www.furniture-building-components.com



The information provided herein, especially recommendations for the usage and the application of our products, is based upon our knowledge and experience. Due to different materials used as well as to varying working conditions beyond our control we strictly recommend to carry out intensive trials to test the suitability of our products with regard to the required processes and applications. We do not accept any liability with regard to the above information or with regard to any verbal recommendation, except for cases where we are liable of gross negligence or false intention. The information is protected by copyright. In particular, any reproductions, adaptations, stranslations, storage and processing in other media, including storage or processing by electronic means, enjoy copyright protection. Any exploitation in whole or in part thereof shall require the prior written consents of Henkel AG & Co. KGaA. Except as otherwise noted, all marks used in this document are trademarks and/or registered trademarks of Henkel and/or its affiliates in the US, Germany, and elsewhere. © Henkel AG & Co. KGaA, 6/2022